


LEGEND

- 1 WAY LIGHT SWITCH (DP=DOUBLE POLE)
- 2 WAY LIGHT SWITCH (WIDE ROCKER TYPE)
- FAN ISOLATING SWITCH
- K+2G EMERGENCY LIGHTING KEY SWITCH x2
- INTERMEDIATE SWITCH
- 'I' DENOTES LED INDICATOR
- ⌊PBX TELEPHONE OUTLET
- ⌊BTM BT MASTER TELEPHONE OUTLET
- ⌊BTE BT EXTENSION TELEPHONE OUTLET WIRED TO BT MASTER OUTLET.
- ⌊MTV MATV SYSTEM - MASTER
- ⌊MTVE MATV - TV OUTLET EXTENSION
- ⊙ HD HEAT DETECTOR
- ⊙ SD OPTICAL SMOKE DETECTOR
- ⊙ SB OPTICAL SMOKE DETECTOR (SOUNDER BASE)
- ⊙ CO CARBON MONOXIDE DETECTOR (SOUNDER BASE)
- ⌋ EMERGENCY PULL CORD
- ⌋ DOOR BELL SOUNDER
- ⌋ DOOR BELL PUSH
- ⊙ ENERGY SAVING CEILING MOUNTED LIGHT
- ⊙ CEILING ROSE WITH LOW ENERGY LIGHT
- ⊙ CIRCULAR STANDARD CEILING LIGHT
- ⊙ CIRCULAR EMERGENCY CEILING LIGHT
- ⊙ LED NON MAINTAINED EMERGENCY LIGHT. FIRE RATED AND WITH INSULATION SUPPORT BOX ON TOP FLOOR APARTMENTS.
- ⊙ WALL LIGHT AS FRANKLITE WB243EL/8SS
- ⊙ TWIN SWITCHED SOCKET (NEON INDICATOR)
- ⌋ SWITCHED SPUR
- DB DENOTES DOORBELL
- F DENOTES FAN UNIT
- GB DENOTES GATEWAY BOX
- ⊙ FIRE DOOR CLOSER CONNECTION POINT (these are wired from external fire alarm system)
- ⊙ WC DISPERSED ALARM UNIT WITH PULL CORD
- ⊙ SH SHAVER POINT
- ⊙ CONSUMER UNIT (low level) - 1200mm
- ⊙ GRID 3 GANG GRID SWITCH c/w FOLLOWING SWITCHES
 - * WASHING MACHINE/DRYER
 - * FRIDGE FREEZER
 - * DISHWASHER
 NOTE: ENHANCED FLATS HAVE A 4 GANG SWITCH WHICH INCLUDES A SWITCH FOR THE COOKER HOOD
- ⊙ IP44 ENERGY SAVING 18W TC-TEL LAMP, HF, RECESSED DOWNLIGHTER WITH WHITE BEZEL IP44, CLEAR GLASS ATTACHMENT, 125 Ø MM MAX, COMPLETE. FIRE RATED LUMINAIRES SHALL BE FITTED THROUGH FIRE RATED CEILINGS, AS AURORA LPF650+LPF683. ALL TOP FLOOR APARTMENT RECESSED LUMINAIRES SHALL BE ENCLOSED WITHIN AN INSULATION SUPPORT BOX TO ENSURE FREE AIR SURROUNDS THE LUMINAIRE.
- ⊙ IP44 ENERGY SAVING 18W TC-TEL LAMP, HF, RECESSED DOWNLIGHTER WITH WHITE BEZEL IP44, CLEAR GLASS ATTACHMENT, 125 Ø MM MAX, COMPLETE WITH INVERTER AND 3HOUR EMERGENCY BATTERY PACK. FIRE RATED LUMINAIRES SHALL BE FITTED THROUGH FIRE RATED CEILINGS, AS AURORA LPF650/EM+LPF683. ALL TOP FLOOR APARTMENT RECESSED LUMINAIRES SHALL BE ENCLOSED WITHIN AN INSULATION SUPPORT BOX TO ENSURE FREE AIR SURROUNDS THE LUMINAIRE.
- ⊙ MP MEDIA PLATE CONTAINING FOLLOWING:
 - 2-TWIN 13A SOCKETS
 - 1-BT OUTLET
 - 1-RJ45 DATA OUTLET
 - 4-SATELLITE OUTLETS
 - 1-SATELLITE RETURN
 - 2-BLANKS
 * WHERE BTE AND PBX OUTLETS ARE INSTALLED TOGETHER, THEY SHALL BE MOUNTED AS A TWIN OUTLET PLATE FIXED ONTO A SINGLE SOCKET BOX.
- ⊙ MAIN WATER BOND

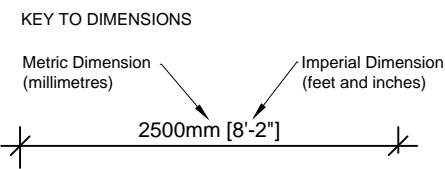

Copyright of this drawing is vested in the architect and must not be copied or reproduced without consent. Every effort has been made to ensure these details are correct but this drawing does not constitute a legal document. Do not scale off this drawing - if in doubt ask.

THE INFORMATION IN THIS LEAFLET DOES NOT IN ANY WAY FORM PART OF A CONTRACT OR WARRANTY.

THE PARTICULARS ARE SENT OUT AS A GENERAL OUTLINE FOR GUIDANCE ONLY.

Apartment 102 Type C4 (First Floor)

Apartment Type C4 (Enhanced)
Unit 102 Area=66.0sqm



client
ExtraCare Charitable Trust

project
Bournville Care Village
Bournville, Birmingham

title
Apartment 102 - Marketing Drawing

Job no. 12-014 scale 1:50 (A3) date 15/01/14